

USER MANUAL

MyALARM3 CLOUD W-AIR



SENECA S.r.l.

Via Austria 26 – 35127 – Z.I. - PADOVA (PD) - ITALY

Tel. +39.049. 8705355 Fax +39 049.8706287

www.seneca.it



ORIGINAL INSTRUCTIONS

CAUTION

SENECA does not guarantee that all specifications and/or aspects of the product and firmware, included in them, will meet the requirements of the actual final application even if the product referred to in this documentation is in compliance with the technological state of the art.

The user assumes full responsibility and/or risk with regard to the configuration of the product to achieve the intended results in relation to the specific installation and/or end application.

SENECA may, with prior agreement, provide consultancy services for the successful completion of the final application, but under no circumstances can it be held responsible for its proper functioning.

The SENECA product is an advanced product, the operation of which is specified in the technical documentation supplied with the product itself and/or can be downloaded, if desired prior to purchase, from the www.seneca.it website.

SENECA has a policy of continuous development and accordingly reserves the right to make and/or introduce - without prior notice - changes and/or improvements to any product described in this documentation.

The product described in this documentation may solely and exclusively be used by personnel qualified for the specific activity and in accordance with the relevant technical documentation, with particular attention being paid to the safety instructions.

Qualified personnel means personnel who, on the basis of their training, competence and experience, are able to identify risks and avoid potential hazards that could occur during the use of this product.

SENECA products may only be used for the applications and in the manner described in the technical documentation relating to the products themselves.

To ensure proper operation and prevent the occurrence of malfunctions, the transport, storage, installation, assembly, maintenance of SENECA products must comply with the safety instructions and environmental conditions specified in this documentation.

SENECA's liability in relation to its products is governed by the general conditions of sale, which can be downloaded from www.seneca.it.

Neither SENECA nor its employees, within the limits of applicable law, will in any case be liable for any lost profits and/or sales, loss of data and/or information, higher costs incurred for goods and/or replacement services, damage to property and/or persons, interruption of activities and/or provision of services, any direct, indirect, incidental, pecuniary and non-pecuniary, consequential damages in any way caused and/or caused, due to negligence, carelessness, incompetence and/or other liabilities arising from the installation, use and/or inability to use the product.

CONTACT US

Technical support	supporto@seneca.it
Product information	commerciale@seneca.it

This document is the property of SENECA srl.
Copies and reproduction are prohibited unless authorised.

Document revisions

DATE	REVISION	NOTES	AUTHOR
16/04/2024	0	First issue	MM AZ
29/07/2024	1	Improved AP – STATION passage chapter	MM
15/10/2024	2	Added changes for new firmware 1.0.0.53	MM

TABLE OF CONTENTS

1.	PRELIMINARY WARNINGS	6
2.	PRODUCT DESCRIPTION.....	7
3.	CONTROL UNIT INSTALLATION.....	8
3.1.	SWITCHING THE CONTROL UNIT ON AND OFF	9
3.2.	FIRST STARTUP PROCEDURE	10
3.3.	ELECTRICAL CONNECTIONS	16
4.	DISPLAY	16
4.1.	MAIN MENU	16
4.1.1.	SWITCHING FROM WIFI “STATION” MODE TO “ACCESS POINT” MODE AND VICE VERSA	17
4.2.	SCREEN CHANGE AND CONTEXTUAL MENUS	18
4.2.1.	MAIN SCREEN	19
4.2.2.	TEMPERATURE MEASUREMENT SCREEN	19
4.2.3.	ANALOG INPUT 1 AND 2 SCREENS.....	19
4.2.4.	TOTALISER SCREENS 1, 2, 3 AND 4	20
4.2.5.	DATE AND TIME SCREEN.....	20
4.2.6.	CONTROL UNIT STATUS SCREEN	20
5.	ACTIVATION AND MANAGEMENT OF THE CLOUD SERVICE	21
5.1.	USER ACCOUNT (GUEST)	21
5.2.	EXAMPLES	22
5.2.1.	THREE “OWNER ACCOUNTS” ONLY MANAGE THEIR OWN CONTROL UNIT:	22
5.2.2.	AN “OWNER ACCOUNT” AND TWO “USER ACCOUNTS” MANAGE THE SAME CONTROL UNIT:	23
5.2.3.	CROSS INVITATIONS:	24
5.3.	ACCOUNT ACTIVATION	24
5.3.1.	ACTIVATING THE ACCOUNT FROM THE MYALARM3 CLOUD APP	25
5.3.2.	ACTIVATION OF THE ACCOUNT FROM THE WEB BROWSER	25
5.4.	INVITE OTHER ACCOUNTS TO CONTROL YOUR CONTROL UNIT	25
5.5.	CANCELLATION OF THE OWNER ACCOUNT	25
5.6.	CHANGE OF OWNERSHIP OF THE CONTROL UNIT FROM ONE OWNER ACCOUNT TO ANOTHER (MOVING FROM INSTALLER TO CUSTOMER).....	26
5.7.	CLOUD SERVICE RENEWAL	27
5.8.	REVOKE AN INVITATION TO A GUEST ACCOUNT FROM AN OWNER ACCOUNT	27
5.9.	DELETE THE INVITATION RECEIVED	27
6.	INSTALLATION OF THE EXTERNAL NTC TEMPERATURE PROBE	28
7.	MANUAL FIRMWARE UPDATE PROCEDURE VIA MICROSD CARD	29
8.	ENABLING NOTIFICATIONS ON ANDROID 11 OR HIGHER DEVICES.....	30

9. TROUBLESHOOTING.....31

1. PRELIMINARY WARNINGS



ATTENTION!

This user manual extends the information from the installation manual to the configuration of the device. Use the installation manual for more information.



ATTENTION!

- Do not apply different voltages or higher voltages than indicated between terminals, or between any terminal and earth (voltages greater than 50Vdc)
- Do not use the MyAlarm3 Cloud W-AIR control unit if damaged, or if signs of possible damage are visible on it.
 - Do not remove the internal battery.
 - Do not use the MyAlarm3 Cloud W-AIR control unit if it runs abnormally.
 - Do not touch the control unit terminals during use
 - For a correct use, use the cables supplied.
- Make sure the internal battery is charged if you intend to use the MyAlarm3 Cloud W-AIR control unit without power.
 - Use the MyAlarm3 Cloud W-AIR control unit as described in this manual.
 - Before each use, refer to the electrical connections shown in the manual.

2. PRODUCT DESCRIPTION

MyAlarm3 Cloud W-AIR is a monitoring system consisting of an intelligent control unit for remote control of homes, systems, machinery and unattended instruments.

The system is based on a Cloud platform offered by SENECA S.R.L. (<https://cloud.seneca.it/>).

The Cloud service subscription is included with the purchase of the product.

The SENECA Cloud service is free for 24 months from the product activation date.

For information and service renewal costs go to the website on the web page dedicated to the product:

<https://www.seneca.it/prodotti/myalarm3-cloud/>

Through the Seneca MyALARM3 Cloud APP (available for both Android and iOS) it is possible to:

View the status of the digital input in real time

View the status of the analog input in real time

View the status of the alarms in real time

Control digital outputs

Receive alarms

Configure the device and the alarms

Set temperature thresholds, actions and alarms on event for the room air conditioning phases

Create and manage the accounts of users invited to the service

3. CONTROL UNIT INSTALLATION



ATTENTION!

FOR CORRECT OPERATION OF THE CONTROL UNIT IT IS NECESSARY THAT THE SD CARD SUPPLIED BE ALWAYS INSERTED!



ATTENTION!

IT IS NECESSARY TO HAVE A WIFI ROUTER CONNECTED TO THE INTERNET FOR THE CONTROL UNIT TO WORK

The control unit allows you to manage alarms and measurements remotely in real time via the Seneca cloud and the APP installed on one or more smartphones.

To do this you need to have an Internet connection and a WIFI router to which you will connect the device.

The initial configuration for connection to the WIFI router takes place locally, but subsequent configurations of the device take place remotely via the APP.


3.1. SWITCHING THE CONTROL UNIT ON AND OFF **ATTENTION!**

THE NEWLY PURCHASED CONTROL UNIT IS IN "SHIPPING MODE" IN ORDER TO PRESERVE THE BATTERY.


TO START THE CONTROL UNIT FOR THE FIRST TIME IT IS NECESSARY TO USE THE SUPPLIED POWER SUPPLY AND TO POWER THE DEVICE VIA THE ELECTRICITY MAINS.
FOR THE FIRST IGNITION, PLEASE REFER TO THE "FIRST STARTUP PROCEDURE" DESCRIBED IN THE NEXT CHAPTER

 **ATTENTION!**

IT IS SWITCHED OFF BY HOLDING THE "PWR" BUTTON PRESSED UNTIL THE MAIN MENU APPEARS.




AT THIS POINT SELECT THE "POWER OFF" ITEM WITH THE "SCR" BUTTON AND CONFIRM SWITCHING OFF WITH "PWR"

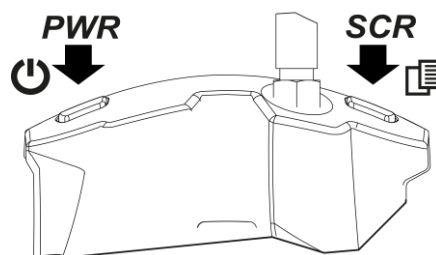


3.2. FIRST STARTUP PROCEDURE


- Download and install the “MyALARM3 Cloud by Seneca” APP on your mobile phone:

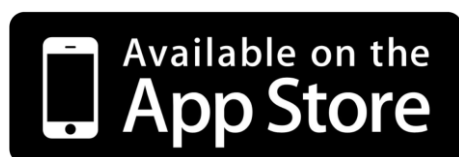

- Insert the provided microSD card (if not already inserted) and install the antenna:



- Power supply: for the first start-up use the supplied power supply and follow the next image for the wiring. If this is the first time you turn it on, you will need to insert the power supply into the socket and then press the "PWR" button:

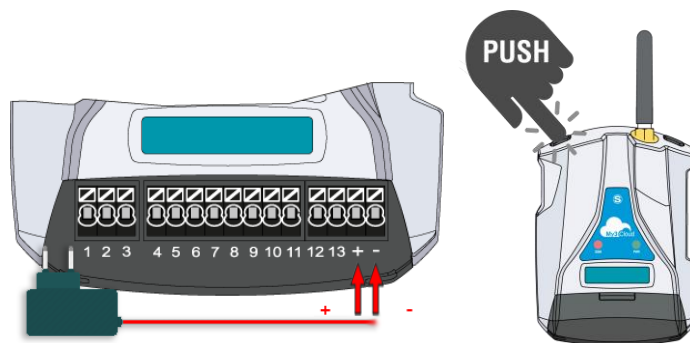

- Start-up: At this point the control unit turns on and the writing "WIFI ACCESS POINT" will appear on the display, the "NET" LED flashes continuously and the control unit is therefore ready to accept the WIFI connection of a smartphone for the first configuration.




- Using your mobile phone, search for and connect to the WIFI network:

MYA_XXXXXXXXXX

(where XXXXXXXXXXXX is the unique MAC address of the control unit)

Once connected to the control unit's WIFI, if the webserver page does not open automatically, you need to press the highlighted icon:

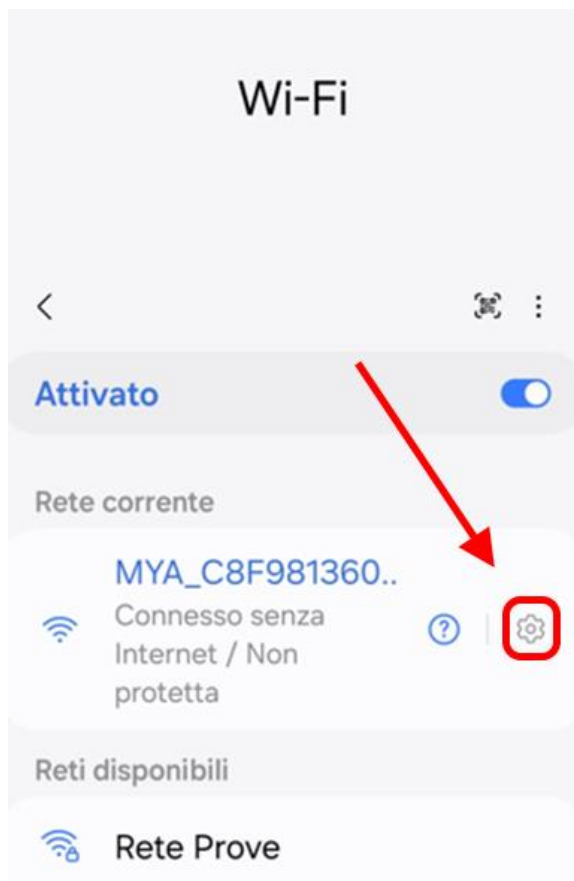


And then press the "Manage router" button:




At this point, the browser opens automatically with the control unit's address:

<http://192.168.4.1>

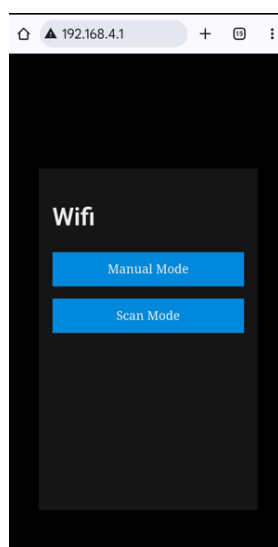


You can manually enter the wifi network or search for it via scan.


To search for the wifi network to which the control unit will connect, press the “SCAN MODE” button to start the network scan process:

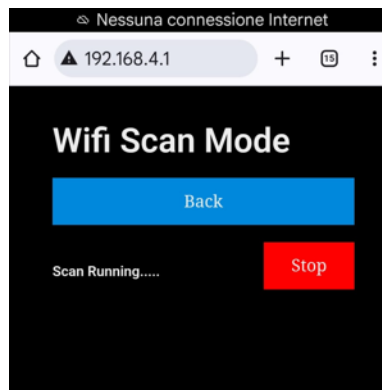

At the end, the wifi networks are displayed:

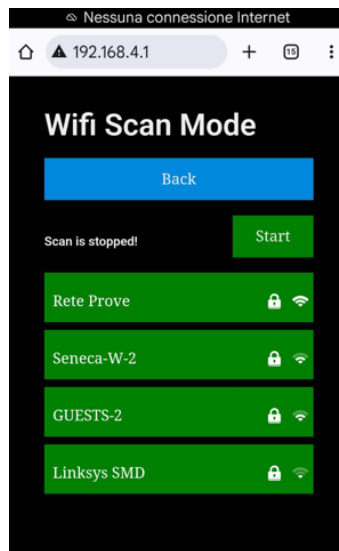


Now choose the network to which you want to connect the control unit:

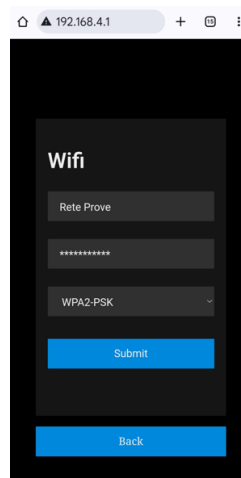



You can now enter the password of the WIFI router to which the control unit will connect.
The same operation can also be performed via a PC or tablet equipped with WIFI.

- At this point the control unit will restart in station mode by connecting to the WIFI router. If the connection parameters have been entered correctly, the “NET” LED is on steadily, flashing only when sending data. Furthermore, the WIFI signal level appears on the main page:



- You can now proceed to the account activation procedure.

3.3. ELECTRICAL CONNECTIONS

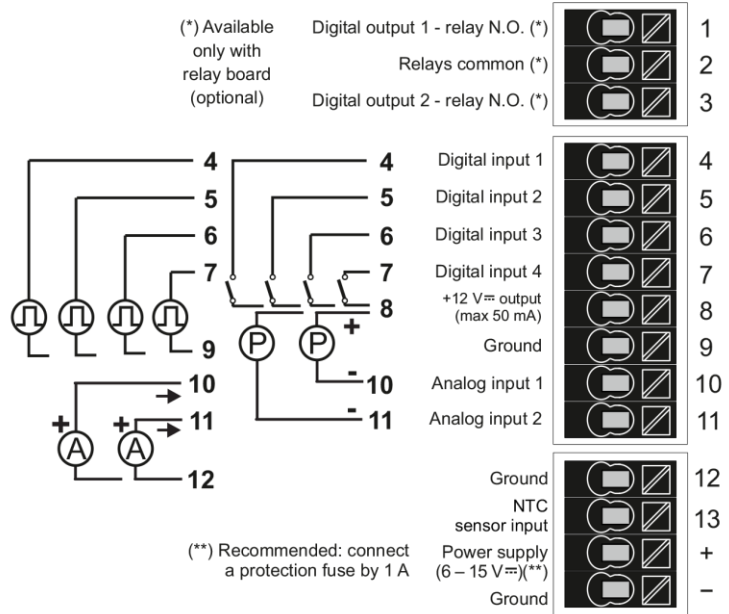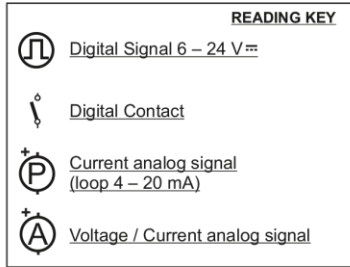


For more information, refer to Installation manual.


4. DISPLAY

4.1. MAIN MENU

The main menu can be accessed via the main screen:




Press the “PWR” button for a few seconds until the menu appears.

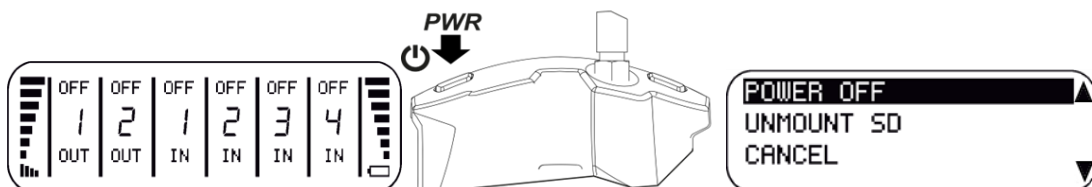

In the main menu it is possible to scroll through the items with the “SCR” key and confirm with the “PWR” key.

4.1.1. SWITCHING FROM WIFI “STATION” MODE TO “ACCESS POINT” MODE AND VICE VERSA

Access the main menu and scroll through the main menu items with the SCR button until you select the Wi-Fi mode change between “Access Point Mode” or “Station Mode”:

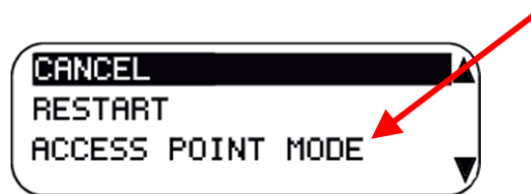

STATION MODE:

Allows connection with a WiFi router connected to the internet (normal operation)

ACCESS POINT MODE:

Allows you to temporarily set the control unit so that it can be configured with a smartphone via WiFi.

In Access Point mode the control unit activates a webserver that can be reached at the address:

<http://192.168.4.1>

In the webserver it is possible to enter the SSID of the WiFi router connected to the internet and the related access password.

By pressing the “Submit” button the control unit restarts in Station mode and connects to the WiFi router.


4.2. SCREEN CHANGE AND CONTEXTUAL MENUS

Starting from the main display it is possible to change the screen by pressing the “SCR” button.


If a small triangle ▲ appears at the top right of the screen, it means that it is possible to access a contextual menu.

To access the contextual menu, press the “SCR” button for a few seconds.

You move through the menu with the “SCR” button and confirm the selection with the “PWR” button.

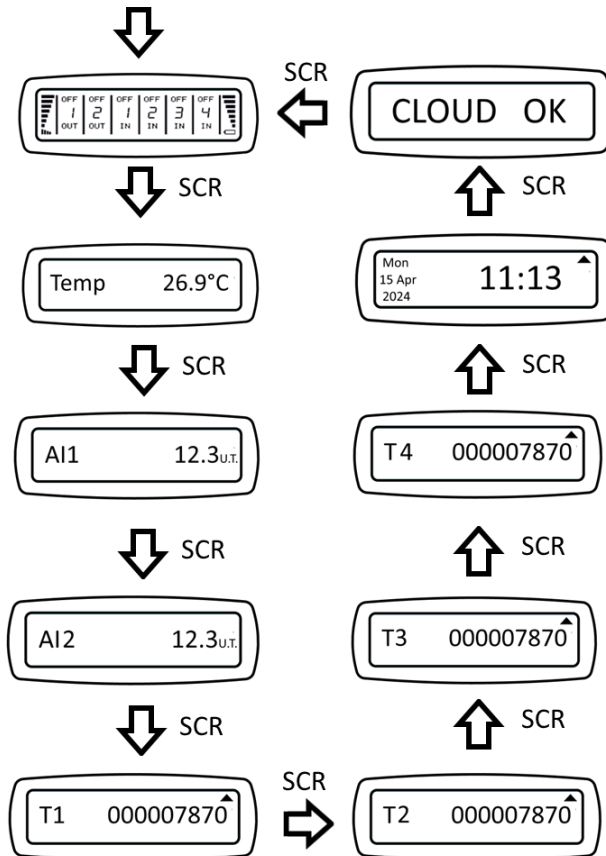


4.2.1. MAIN SCREEN

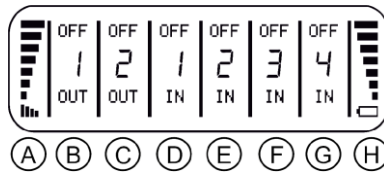

The main screen shows:


- A - WiFi signal level
- B - output relay 1 status
- C - output relay 2 status
- D - digital input 1 status
- E - digital input 2 status
- F - digital input 3 status
- G - digital input 4 status
- H - battery level

4.2.2. TEMPERATURE MEASUREMENT SCREEN




The temperature screen shows the measurement of the temperature sensor (NTC type) expressed in °C.

4.2.3. ANALOG INPUT 1 AND 2 SCREENS

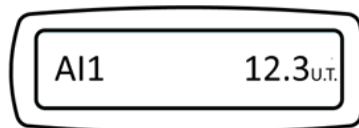


The screens of analog inputs 1 and 2 show the measurements of the two analog inputs in voltage or current expressed in technical units (if the scaling is the default one, the units of measurement are Volts for voltages and mA for currents).

4.2.4. TOTALISER SCREENS 1, 2, 3 AND 4

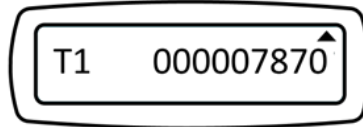


The totalizer screens show the values totalized by the respective digital inputs. If the control unit is turned off, the value of the totalizers is not lost. To reset the totalizers use the context menu.

4.2.5. DATE AND TIME SCREEN

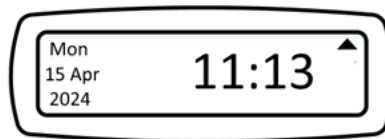

The Date and Time screen shows the current clock value, this information is important when using the sunrise and sunset calculation function.

4.2.6. CONTROL UNIT STATUS SCREEN



This screen shows the status of the control unit, if the connection was successful the text will appear on the display:

“CLOUD OK” this means that the control unit is correctly configured and that it has successfully connected to the Seneca cloud.

In case of cloud connection errors, the text will be **“CLOUD ERR”**

Other texts relating to other types of errors are also shown.

5. ACTIVATION AND MANAGEMENT OF THE CLOUD SERVICE

To use the MyAlarm3 Cloud W-AIR monitoring system it is necessary to register a SENECA Cloud account and activate the dedicated service.

SERVICE: is the MyAlarm3 Cloud W-AIR device registered to the Seneca Cloud.

ACCOUNT: is a natural person registered with the Seneca Cloud and identified by name, surname and email.

- **OWNER ACCOUNT:** is the account that activates and manages the single MyAlarm3 Cloud service of its ownership and responsibility.
- **USER ACCOUNT (GUEST):** this is the account that can use the single MyAlarm3 Cloud service after receiving the invitation from the owner of the service. The owner account can provide the guest user account with three levels of privileges.

5.1. USER ACCOUNT (GUEST)

Each activated Service (therefore each MyAlarm3 Cloud W-AIR) is managed solely by the Owner Account, who also has full responsibility for it, while multiple User Accounts (Guest) can use the single service after receiving the invitation from the Owner Account.

Only the Account Owner can invite another account.

The Owner Account can either invite other User Accounts to use his control units as guest users, or be invited by other Owner Accounts.

The User Account is the guest user of MyAlarm3 Cloud W-AIR not owned by it after an invitation to use by the respective Account Owner.

It is not necessary to have a MyAlarm3 Cloud W- AIR to register in the Seneca Cloud and be invited by an Owner Account.


In this way, it is possible to create cross fleets of MyAlarm3 Clouds W- AIR with owners of one or more devices, individual users of a device and system maintainers with access to groups of systems consisting of multiple MyAlarm3 Cloud devices.

The Account Owner can invite a User Account with three levels of privileges:

GUEST USER ACCOUNT (DEFAULT): view information, receive notifications.


GUEST USER ACCOUNT EDITOR: view information, send commands, receive notifications.

ADMIN GUEST USER ACCOUNT: view information, send commands, receive notifications, change settings (can change widgets).

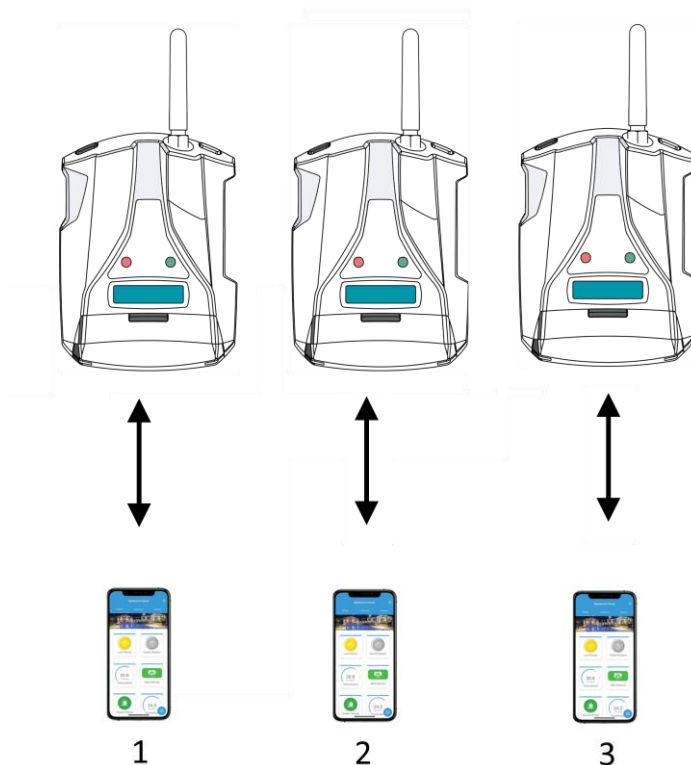5.2. EXAMPLES**5.2.1. THREE “OWNER ACCOUNTS” ONLY MANAGE THEIR OWN CONTROL UNIT:**


In this case, control unit 1 will send notifications only to owner account 1, control unit 2 only to owner account 2 etc.

Likewise, only owner account 1 will have access to control unit 1 etc.

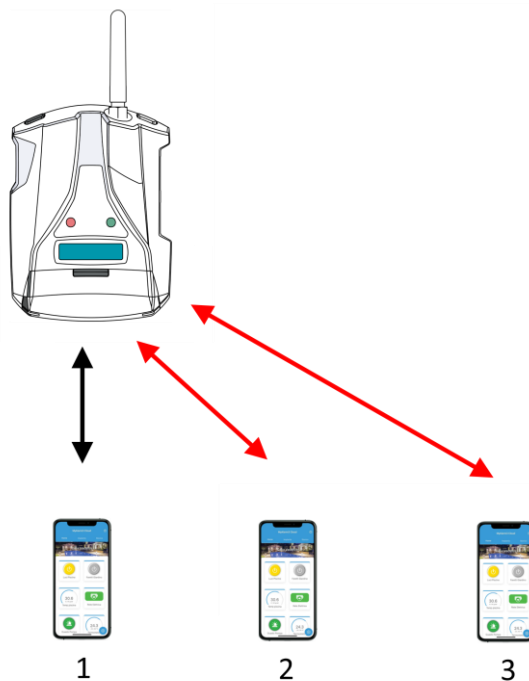5.2.2. AN “OWNER ACCOUNT” AND TWO “USER ACCOUNTS” MANAGE THE SAME CONTROL UNIT:

In this example, owner account 1 invited user accounts 2 and 3. The notifications will reach all 3 accounts, accounts 2 and 3 will also be able to access the remote control unit.

5.2.3. CROSS INVITATIONS:

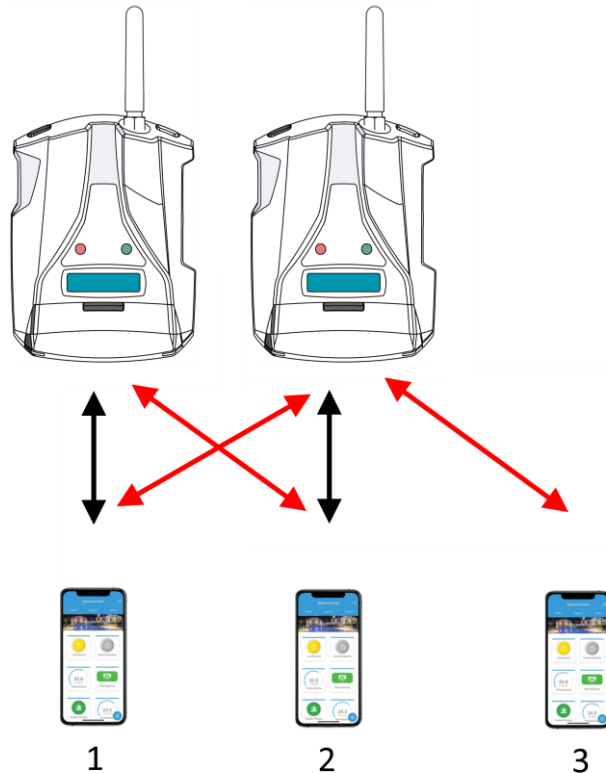

Owner Account 1 manages the first control unit, Owner Account 2 manages the second. However, both can access each other's control unit because they have invited each other. User account 3 only had access to the second control unit. The notifications from the first control unit will arrive at accounts 1 and 2, the notifications from the second control unit will arrive at accounts 1, 2 and 3.

5.3. ACCOUNT ACTIVATION

To use MyAlarm3 Cloud W-AIR it is necessary to register a SENECA Cloud account and activate the dedicated service.

The KIT includes a usage fee lasting 24 months from the date of first activation.

For more information on renewal costs visit the product page on the website:

<https://www.seneca.it/prodotti/myalarm3-cloud/>

The activation procedure is available from both WEB browser and MyAlarm3 Cloud mobile app.

If you have purchased a new MyAlarm3 Cloud W-AIR and already have a Seneca account, it is not necessary to create a new account but simply add the 5+10 character code on the back of the control unit to your account.

5.3.1. ACTIVATING THE ACCOUNT FROM THE MYALARM3 CLOUD APP

- As soon as the APP is launched, create the account and wait for the activation email
- Once you have received the activation email, select the "ACTIVATE ACCOUNT" key;
- After activating the account, connect again to the address <https://cloud.seneca.it> to log in for the first time. Select the "CLOUD SERVICES" key and select "ADD" in the top right hand corner;
- Enter the 5+10 character "Activation Code" on the back of the control unit and select the "ADD" key again;
- From this moment the service is active and the account owner of the control unit can access the MyAlarm3 Cloud system from the APP, as well as invite other users to use its newly activated MyAlarm3 Cloud W-AIR.

5.3.2. ACTIVATION OF THE ACCOUNT FROM THE WEB BROWSER

- Connect to <https://cloud.seneca.it> to register your own SENECA Cloud account (if not previously done to activate services related to other MyAlarm3 Cloud W- AIR devices owned or to be able to access as a guest user services related W- AIR to MyAlarm3 Cloud W-AIR belonging to other accounts after their invitation). Wait for the account activation email;
- After receiving the account activation email, select the "ACTIVATE ACCOUNT" key;
- After activating the account, connect again to the address <https://cloud.seneca.it> to log in for the first time. Select the "CLOUD SERVICES" key and select "ADD" in the top right hand corner;
- Enter the 5+10 character "Activation Code" on the back of the control unit and select the "ADD" button again; (*)
- From this moment the service is active and the account owner of the control unit can access the MyAlarm3 Cloud system from the APP, as well as invite other users to use its newly activated MyAlarm3 Cloud W-AIR.

(*) The operation requires less than 1 minute during which the device is synchronized with the Seneca Cloud platform..

5.4. INVITE OTHER ACCOUNTS TO CONTROL YOUR CONTROL UNIT

It is possible to invite other accounts to control your control unit from the APP in this way:

- Open the app, select the control unit you want to share, in the options menu select "INVITATIONS" (Available only for the user who owns the Myalarm3 Cloud)
- Enter the email address of the user to invite and the role (GUEST ADMIN, GUEST EDITOR, GUEST USER) to assign, then select the "INVITE" button.
- From this moment on, follow the instructions in the emails that the Seneca Cloud will send to the guest user.

5.5. CANCELLATION OF THE OWNER ACCOUNT

To irreversibly delete the owner account, follow the instructions below:

- Access your Cloud account via the WEB browser:
<https://cloud.seneca.it>

or via APP select: "options" → "Account" and selecting the "Manage Cloud Service" button

- Select "Cloud Services"
- Select the "MANAGEMENT" key for the Service you want to reset
- Select the "Remove service" name from the "ADVANCED" menu (e.g. Remove MyAlarm3 Cloud Service xxxxx)
- Proceeding with the removal of the service, all the settings and information related to it will be irreversibly reset. The Service will no longer be associated with the owner account and the activation code can be used again by another account (which will become the new owner account of this service)
- The MyAlarm3 Cloud service is reset to factory data.

N.B.: The Owner Account is responsible for Seneca's Cloud service and its renewal, and it is also responsible for the use and maintenance of the control unit. Seneca S.R.L. is not responsible for any inappropriate use and for functions and installations not indicated in this manual.

5.6. CHANGE OF OWNERSHIP OF THE CONTROL UNIT FROM ONE OWNER ACCOUNT TO ANOTHER (MOVING FROM INSTALLER TO CUSTOMER)

To transfer ownership of the MyAlarm3 Cloud control unit to another administrator account

(*) follow the instructions below:

Log in to the administrator Cloud account where the service to be transferred is by connecting to the address <https://cloud.seneca.it>

- Select "CLOUD SERVICES"
- Select the "MANAGEMENT" key for the Service you want to transfer
- Select the "Change of ownership" item from the "ADVANCED" menu and enter the email address of the new administrator (*)
- The new administrator will receive an email summarizing the operation.
- To complete the procedure, the new administrator will have to reactivate the service using the activation code on the back of the product.

(*) before proceeding with the migration the new owner must have/create its own administrator account.

5.7. CLOUD SERVICE RENEWAL

For more information on renewal costs, consult the product page on the www.seneca.it website

The renewal procedure must be carried out by the owner Account.

Renewal procedure:

- Access the account that owns the service by connecting to the address <https://cloud.seneca.it>
- Select "CLOUD SERVICES"
- Select the "MANAGEMENT" button relating to the Service you intend to renew
- Select the "Renew Service" item from the "ADVANCED" menu (If you need to purchase a renewal code, using the "GO TO CART" button you will be directed to the SENECA portal where you can make the purchase)
- Enter the renewal code in the indicated field and select "APPLY CODE"
- The service expiry date will be extended

5.8. REVOKE AN INVITATION TO A GUEST ACCOUNT FROM AN OWNER ACCOUNT

To revoke an invitation to a guest user:

- Log in with the Owner account by connecting to the address: <https://cloud.seneca.it>
- Select "CLOUD SERVICES"
- Select the "MANAGEMENT" button relating to the Service
- In the list of users, select the one you want to delete and press "DELETE"

5.9. DELETE THE INVITATION RECEIVED

To remove a guest user via the guest user's account:


- Log in with the Owner account by connecting to the address: <https://cloud.seneca.it>
- Select "CLOUD SERVICES"
- Select the item "Cloud services by invitation"
- Select the "DELETE" button and confirm

6. INSTALLATION OF THE EXTERNAL NTC TEMPERATURE PROBE


ATTENTION!

BEFORE PROCEEDING IT IS NECESSARY TO REMOVE POWER TO THE CONTROL UNIT

Before proceeding with the installation of the external NTC probe, it is necessary to remove the NTC probe supplied with the control unit. It will be sufficient to cut or remove the probe located on the back of the control unit:

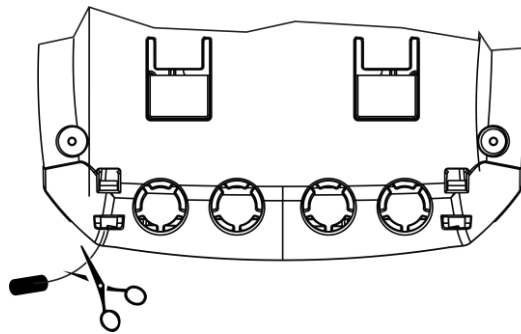

Once the pre-installed probe has been removed, connect the external NTC probe by wiring the cables to terminals 12 and 13 as shown in the figure below:

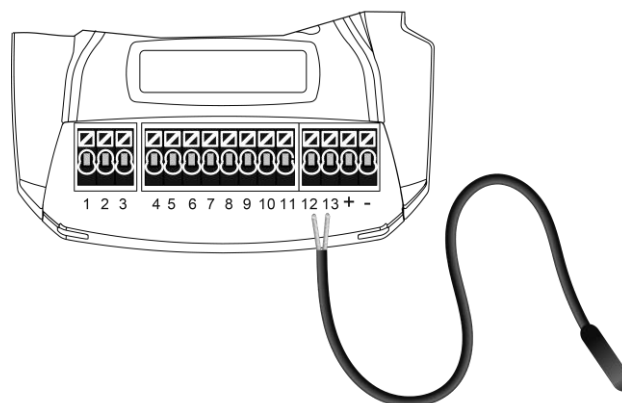

7. MANUAL FIRMWARE UPDATE PROCEDURE VIA MICROSD CARD

Normally the firmware is updated via the APP following the procedure indicated in the APP itself. If you want to update the firmware manually via micro SD, follow the guide below:

- Insert the micro SD into the dedicated reader on the PC;
- Copy the FWOTA.BIN file downloadable in the download section of the internet page dedicated to the product (www.seneca.it/prodotti/myalarm3-clud) into the main folder of the micro SD;
- Insert the micro SD card into the MyAlarm3 Cloud W- AIRcontrol unit;
- Switch the control unit on
- Wait for the message confirming the detection of the new firmware;
- Press “OK” and wait for installation to complete with the unit restarting.
- Now the procedure is complete.

8. ENABLING NOTIFICATIONS ON ANDROID 11 OR HIGHER DEVICES

Since revision 11 of Android it is necessary to manually authorize the ability to receive notifications. To do this follow the procedure below:


Locate the MY3 Cloud APP and keep the icon pressed until the menu appears:




Press the “i” icon:



Move the switch to “Allow Notifications” as shown in the figure:

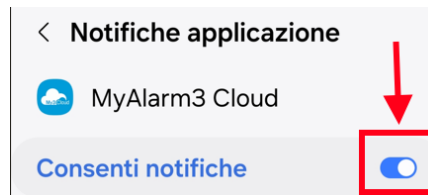

Allow notifications even if the APP is NOT in use as shown in the figure:

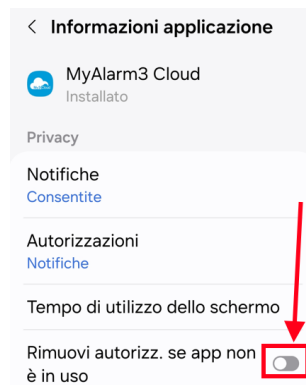

9. TROUBLESHOOTING

NOTIFICATIONS	MEANING	SOLUTION
The yellow NET LED flashes quickly and continuously	<p>WIFI router connection error.</p> <p>Possible causes:</p> <ul style="list-style-type: none"> ▪ Incorrect SSID ▪ Incorrect password ▪ Control unit too far from the WIFI router ▪ Antenna wiring error 	<p>Return the control unit to Access Point mode via the main display menu and check the connection data to the WIFI network.</p> <p>Move the MY3 Cloud closer to the WIFI Router or use an external antenna to improve signal reception</p>
The writing "CLOUD ERR" appears on the status screen of the control unit display and the device appears as "OFFLINE" in the APP	The control unit cannot connect to the cloud, possible lack of internet connection	Check that there is an internet connection
The writing "CLOUD OK" appears on the status screen of the control unit display, but the device appears as "OFFLINE" in the APP	The first 24 months of use of the KIT have expired and the Seneca cloud service has not been renewed	Renew your account
-	The temperature measured by the control unit is not precise enough	Use the external NTC probe (see available accessories)